

N2S and N2SC control stations

Factory sealed, corrosion-resistant
600 VAC, heavy duty

Cl. I, Div. 2, Groups B, C, D
NEMA 3, 4X, 7BCD (Div. 2), 12
Watertight
Weatherproof
Dusttight

4C

Applications:

N2S and N2SC pushbutton stations, selector switches and pilot lights are suitable for use:

- In Class I, Groups B, C, D; Division 2 hazardous areas where flammable vapors or gases may be present due to accidental or abnormal operation
- In damp, wet or corrosive locations
- Indoors or outdoors in Division 2 areas of petroleum refineries, chemical plants and other process industry facilities where similar hazards exist

N2S and N2SC pushbutton stations and selector switches are used:

- In conjunction with magnetic starters or contactors for remote control of motors

N2S and N2SC pilot lights are used:

- To visually indicate at a remote location that the desired function is being performed

Optional maintained stop pushbutton(s) are used: as emergency or normal stop button(s) in motor control circuits for positive shutdown.

Features:

- Pushbutton stations, pilot lights and selector switch devices are factory sealed; external seals are not required
- Enclosures are made of Krydon fiberglass-reinforced polyester material having excellent corrosion resistance and stability to heat and sunlight
- Optional maintained stop feature operates by depressing the mushroom head pushbutton; pushbutton must be manually pulled before start button can be actuated
- Lockout is standard on selector switch devices
- Factory installed dead end (N2S) or through feed (N2SC) hubs – 1/2", 3/4" and 1" sizes
- Indicating plates are available with a choice of 40 standard markings
- Grounding plate included with each hub

Certifications and compliances:

NEC:

- Class I, Division 2, Groups B, C, D

UL standard:

- UL1203

CSA standard:

- C22.2 Nos. 14, 30

Environmental ratings:

- NEMA 3, 4X, 7BCD (Division 2), 12

Electrical ratings:

- Pushbutton stations and selector switches – heavy duty 600 VAC maximum
- Pilot lights – 120-600 VAC

Options:

Description

- Padlock attachments for all pushbuttons **Suffix S708**

For "START/STOP" stations, only "STOP" button provided with lockout (lockout standard with "STOP")

- LED pilot lights in place of standard incandescent pilot lamps.. **LED**

Three-position selector switches with modified operation:


- Momentary contact clockwise operation, spring return to center, maintained contact counterclockwise operation..... **S634**
- Momentary contact counterclockwise operation, spring return to center, maintained contact clockwise operation..... **S635**

Control station with maintained stop pushbutton (requires NCD type enclosure):

- One maintained stop pushbutton **MSR1**
- Two maintained stop pushbuttons..... **MSR2**

Maintained stop pushbuttons are installed at bottom position(s) of control station unless otherwise specified.

Dimensions[Ⓐ] (in inches):

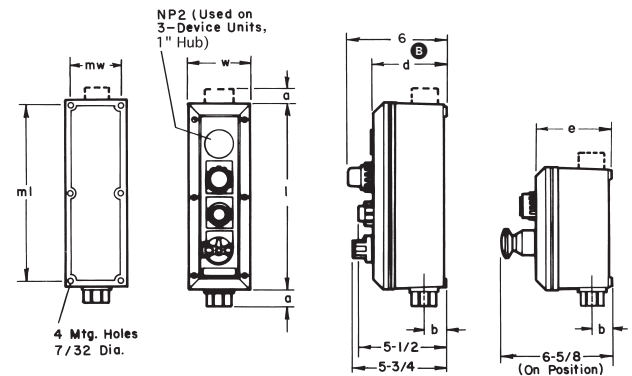

Maintained stop pushbutton

N2S(C) body style	Outside dims. l	w	(NCS) d	(NCD) e	Mounting dims. ml	mw	1/2" and 3/4" hubs a	b	1" hubs a	b
1 or 2 devices	7 1/4	3 13/16	4 3/8	5 3/8	6 3/8	2 15/16	1 1/8	1 1/16	1 1/4	1 5/16
3 or 4 devices	11 3/4	3 13/16	4 3/8	5 3/8	10 7/8	2 15/16	1 1/8	1 1/16	1 1/4	1 5/16

[Ⓐ]Dimensions are approximate, not for construction purposes.

[Ⓑ]Use dimension "e" for control station with 1" hub or maintained stop pushbutton.

[Ⓒ]NCS box is supplied with units using 1/2" and 3/4" hubs. NCD box is supplied with units using 1" hubs or MSR option. NCD 4 device box used with 1" hubs or MSR option.

N2S and N2SC control stations

Factory sealed, corrosion-resistant
600 VAC, heavy duty

Cl. I, Div. 2, Groups B, C, D
NEMA 3, 4X, 7BCD (Div. 2), 12
Watertight
Weatherproof
Dusttight

4C

Ordering information:

With pilot lights

Enclosure with pilot lights

No. of units	Diagram	Voltage	Enclosure with pilot lights					
			1/2" hubs		3/4" hubs		1" hubs	
			Cat. # Dead end	Cat. # Through feed	Cat. # Dead end	Cat. # Through feed	Cat. # Dead end	Cat. # Through feed
1		120	N2S1131 ①	N2SC1131 ①	N2S2131 ①	N2SC2131 ①	N2S3131 ①	N2SC3131 ①
		240	N2S1132 ①	N2SC1132 ①	N2S2132 ①	N2SC2132 ①	N2S3132 ①	N2SC3132 ①
		480	N2S1134 ①	N2SC1134 ①	N2S2134 ①	N2SC2134 ①	N2S3134 ①	N2SC3134 ①
		600	N2S1135 ①	N2SC1135 ①	N2S2135 ①	N2SC2135 ①	N2S3135 ①	N2SC3135 ①
2		120	N2S1231 ①	N2SC1231 ①	N2S2231 ①	N2SC2231 ①	N2S3231 ①	N2SC3231 ①
		240	N2S1232 ①	N2SC1232 ①	N2S2232 ①	N2SC2232 ①	N2S3232 ①	N2SC3232 ①
		480	N2S1234 ①	N2SC1234 ①	N2S2234 ①	N2SC2234 ①	N2S3234 ①	N2SC3234 ①
		600	N2S1235 ①	N2SC1235 ①	N2S2235 ①	N2SC2235 ①	N2S3235 ①	N2SC3235 ①
3		120	N2S1331 ①	N2SC1331 ①	N2S2331 ①	N2SC2331 ①	N2S3331 ①	N2SC3331 ①
		240	N2S1332 ①	N2SC1332 ①	N2S2332 ①	N2SC2332 ①	N2S3332 ①	N2SC3332 ①
		480	N2S1334 ①	N2SC1334 ①	N2S2334 ①	N2SC2334 ①	N2S3334 ①	N2SC3334 ①
		600	N2S1335 ①	N2SC1335 ①	N2S2335 ①	N2SC2335 ①	N2S3335 ①	N2SC3335 ①
4		120	N2S1431 ①	N2SC1431 ①	N2S2431 ①	N2SC2431 ①	N2S3431 ①	N2SC3431 ①
		240	N2S1432 ①	N2SC1432 ①	N2S2432 ①	N2SC2432 ①	N2S3432 ①	N2SC3432 ①
		480	N2S1434 ①	N2SC1434 ①	N2S2434 ①	N2SC2434 ①	N2S3434 ①	N2SC3434 ①
		600	N2S1435 ①	N2SC1435 ①	N2S2435 ①	N2SC2435 ①	N2S3435 ①	N2SC3435 ①

①Specify lens color for each pilot light

Color	Symbol
Red	J1
Green	J3
Amber	J6
Clear	J10
Blue	J11

Example: N2S1231 with one red and one green pilot light is N2S1231 J1 J3.

①Pilot lights are transformer type except those rated 120 volts. Lamp type is 120MB, 120 volts, 3 watts.

②LED pilot lights are available. Add suffix 'LED' after last color symbol.

N2S and N2SC control stations

Factory sealed, corrosion-resistant
600 VAC, heavy duty

Cl. I, Div. 2, Groups B, C, D
NEMA 3, 4X, 7BCD (Div. 2), 12
Watertight
Weatherproof
Dusttight

4C

Ordering information (continued):

With selector switches



N2S2121

Style	Switch position			Marking unless otherwise specified	Enclosure with selector switch		
	Position 1	Position 2	Position 3		Hub size	Cat. # Dead end	Cat. # Through feed
Two-position, two circuit	A1			START-STOP (or specify)	1/2"	N2S1121 ②	N2SC1121 ②
	A2 • •				3/4"	N2S2121 ②	N2SC2121 ②
					1"	N2S3121 ②	N2SC3121 ②
Two-position, four circuit	A1			START-STOP (or specify)	1/2"	N2S1122 ②	N2SC1122 ②
	A2 • •				3/4"	N2S2122 ②	N2SC2122 ②
	B1				1"	N2S3122 ②	N2SC3122 ②
	B2 • •						
Three-position, two circuit ⑤	A1			Specify	1/2"	N2S1123 ②	N2SC1123 ②
	A2 • •				3/4"	N2S2123 ②	N2SC2123 ②
					1"	N2S3123 ②	N2SC3123 ②
Three-position, four circuit ⑤	A1			Specify	1/2"	N2S1124 ②	N2SC1124 ②
	A2 • •				3/4"	N2S2124 ②	N2SC2124 ②
	B1				1"	N2S3124 ②	N2SC3124 ②
	B2 • •			Specify	1/2"	N2S1125 ②	N2SC1125 ②
	A1				3/4"	N2S2125 ②	N2SC2125 ②
	A2 • •				1"	N2S3125 ②	N2SC3125 ②
	B1						
	B2 • •						

②Specify indicating plate markings, if desired. Standard indicating plate markings are listed below:

Pushbuttons		
START	TEST	CLOSE
STOP	LIGHT ON	UP
ON	HAND	DOWN
OFF	AUTOMATIC	IN
RUN	EMERGENCY	OUT
JOG	FORWARD	RAISE
TRIP	REVERSE	LOWER
RESET	OPEN	
Two-position		
RUN, JOG	FAST, SLOW	IN, OUT
HAND, AUTOMATIC	OPEN, CLOSE	RAISE, LOWER
FORWARD, REVERSE	UP, DOWN	START, STOP
	ON, OFF	
Three-position		
RUN, OFF, JOG	1, OFF, 2	
HAND, OFF, AUTOMATIC	OPEN, OFF, CLOSE	
FORWARD, OFF, REVERSE	UP, OFF, DOWN	
FAST, OFF, SLOW		

⑤ Suffixes 'S634' or 'S635' may be used on these catalog numbers.

N2S and N2SC control stations

Factory sealed, corrosion-resistant
600 VAC, heavy duty

Cl. I, Div. 2, Groups B, C, D
NEMA 3, 4X, 7BCD (Div. 2), 12
Watertight
Weatherproof
Dusttight

4C

Ordering information (continued):

With pushbuttons – momentary contact



N2SC2210

No. of units	Contact symbol	Marking unless otherwise specified	Enclosure with pushbuttons		
			Hub size	Cat. # Dead end	Cat. # Through feed
1		START (or specify)	1/2"	N2S1110 ②	N2SC1110 ②
			3/4"	N2S2110 ②	N2SC2110 ②
			1"	N2S3110 ②	N2SC3110 ②
2		START-STOP (or specify)	1/2"	N2S1210 ②	N2SC1210 ②
			3/4"	N2S2210 ②	N2SC2210 ②
			1"	N2S3210 ②	N2SC3210 ②
3		Specify	1/2"	N2S1310 ②	N2SC1310 ②
			3/4"	N2S2310 ②	N2SC2310 ②
			1"	N2S3310 ②	N2SC3310 ②
4		Specify	1/2"	N2S1410 ②	N2SC1410 ②
			3/4"	N2S2410 ②	N2SC2410 ②
			1"	N2S3410 ②	N2SC3410 ②

②Specify indicating plate markings, if desired. Standard indicating plate markings are listed below:

Pushbuttons		
START	TEST	CLOSE
STOP	LIGHT ON	UP
ON	HAND	DOWN
OFF	AUTOMATIC	IN
RUN	EMERGENCY	OUT
JOG	FORWARD	RAISE
TRIP	REVERSE	LOWER
RESET	OPEN	
Two-position		
RUN, JOG	FAST, SLOW	IN, OUT
HAND, AUTOMATIC	OPEN, CLOSE	RAISE, LOWER
FORWARD, REVERSE	UP, DOWN	START, STOP
	ON, OFF	
Three-position		
RUN, OFF, JOG	1, OFF, 2	
HAND, OFF, AUTOMATIC	OPEN, OFF, CLOSE	
FORWARD, OFF, REVERSE	UP, OFF, DOWN	
FAST, OFF, SLOW		

N2S and N2SC control stations

Factory sealed, corrosion-resistant
600 VAC, heavy duty

Cl. I, Div. 2, Groups B, C, D
NEMA 3, 4X, 7BCD (Div. 2), 12
Watertight
Weatherproof
Dusttight

4C

Ordering information (continued):

Combination control stations



N2S23421 J1

4C

Enclosure with pushbuttons and pilot lights

No. of pilot lights [ⓐ]	No. of pushbuttons	Diagram	Markings	Hub size	Volts	Cat. # Dead end	Cat. # Through feed	Volts	Cat. # Dead end	Cat. # Through feed
1	1		Specify	1/2"	120	N2S12411 ①②	N2SC12411 ①②	480	N2S12414 ①②	N2SC12414 ①②
				3/4"		N2S22411 ①②	N2SC22411 ①②		N2S22414 ①②	N2SC22414 ①②
				1"		N2S32411 ①②	N2SC32411 ①②		N2S32414 ①②	N2SC32414 ①②
				1/2"	240	N2S12412 ①②	N2SC12412 ①②	600	N2S12415 ①②	N2SC12415 ①②
				3/4"		N2S22412 ①②	N2SC22412 ①②		N2S22415 ①②	N2SC22415 ①②
				1"		N2S32412 ①②	N2SC32412 ①②		N2S32415 ①②	N2SC32415 ①②
1	2		Specify	1/2"	120	N2S13421 ①②	N2SC13421 ①②	480	N2S13424 ①②	N2SC13424 ①②
				3/4"		N2S23421 ①②	N2SC23421 ①②		N2S23424 ①②	N2SC23424 ①②
				1"		N2S33421 ①②	N2SC33421 ①②		N2S33424 ①②	N2SC33424 ①②
				1/2"	240	N2S13422 ①②	N2SC13422 ①②	600	N2S13425 ①②	N2SC13425 ①②
				3/4"		N2S23422 ①②	N2SC23422 ①②		N2S23425 ①②	N2SC23425 ①②
				1"		N2S33422 ①②	N2SC33422 ①②		N2S33425 ①②	N2SC33425 ①②
2	1		Specify	1/2"	120	N2S13411 ①②	N2SC13411 ①②	480	N2S13414 ①②	N2SC13414 ①②
				3/4"		N2S23411 ①②	N2SC23411 ①②		N2S23414 ①②	N2SC23414 ①②
				1"		N2S33411 ①②	N2SC33411 ①②		N2S33414 ①②	N2SC33414 ①②
				1/2"	240	N2S13412 ①②	N2SC13412 ①②	600	N2S13415 ①②	N2SC13415 ①②
				3/4"		N2S23412 ①②	N2SC23412 ①②		N2S23415 ①②	N2SC23415 ①②
				1"		N2S33412 ①②	N2SC33412 ①②		N2S33415 ①②	N2SC33415 ①②
2	2		Specify	1/2"	120	N2S14421 ①②	N2SC14421 ①②	480	N2S14424 ①②	N2SC14424 ①②
				3/4"		N2S24421 ①②	N2SC24421 ①②		N2S24424 ①②	N2SC24424 ①②
				1"		N2S34421 ①②	N2SC34421 ①②		N2S34424 ①②	N2SC34424 ①②
				1/2"	240	N2S14422 ①②	N2SC14422 ①②	600	N2S14425 ①②	N2SC14425 ①②
				3/4"		N2S24422 ①②	N2SC24422 ①②		N2S24425 ①②	N2SC24425 ①②
				1"		N2S34422 ①②	N2SC34422 ①②		N2S34425 ①②	N2SC34425 ①②

①Specify lens color for each pilot light

Color	Symbol
Red	J1
Green	J3
Amber	J6
Clear	J10
Blue	J11

②Specify indicating plate markings, if desired. Standard indicating plate markings are listed below:

Pushbuttons

START	TEST	CLOSE
STOP	LIGHT ON	UP
ON	HAND	DOWN
OFF	AUTOMATIC	IN
RUN	EMERGENCY	OUT
JOG	FORWARD	RAISE
TRIP	REVERSE	LOWER
RESET	OPEN	

Two-position

RUN, JOG	FAST, SLOW	IN, OUT
HAND, AUTOMATIC	OPEN, CLOSE	RAISE, LOWER
FORWARD, REVERSE	UP, DOWN	START, STOP
	ON, OFF	

Three-position

RUN, OFF, JOG	1, OFF, 2
HAND, OFF, AUTOMATIC	OPEN, OFF, CLOSE
FORWARD, OFF, REVERSE	UP, OFF, DOWN
FAST, OFF, SLOW	

ⓐ Pilot lights are transformer type except those rated 120 volts. Lamp type is 120MB, 120 volts, 3 watts.

ⓑ LED pilot lights are available. Add suffix 'LED' after last color symbol.

N2S and N2SC control stations

Factory sealed, corrosion-resistant
600 VAC, heavy duty

Cl. I, Div. 2, Groups B, C, D
NEMA 3, 4X, 7BCD (Div. 2), 12
Watertight
Weatherproof
Dusttight

4C

Ordering information (continued):

Combination control stations

		Selector switch position [Ⓚ]				Enclosure with pilot light, pushbuttons and selector switch							
No. of pilot lights ^{①①}	No. of push-buttons	Pos. 1	Pos. 2	Pos. 3	Markings	Hub size	Volts	Cat. # Dead end	Cat. # Through feed	Volts	Cat. # Dead end	Cat. # Through feed	
1	2	Two-position, two circuit					1/2"	N2S145211 ①②	N2SC145211 ①②		N2S145214 ①②	N2SC145214 ①②	
					Specify	120	3/4"	N2S245211 ①②	N2SC245211 ①②	480	N2S245214 ①②	N2SC245214 ①②	
							1"	N2S345211 ①②	N2SC345211 ①②	N2S345214 ①②	N2SC345214 ①②		
							1/2"	N2S145212 ①②	N2SC145212 ①②	N2S145215 ①②	N2SC145215 ①②		
						240	3/4"	N2S245212 ①②	N2SC245212 ①②	600	N2S245215 ①②	N2SC245215 ①②	
							1"	N2S345212 ①②	N2SC345212 ①②	N2S345215 ①②	N2SC345215 ①②		
1	2	Three-position, two circuit					1/2"	N2S145231 ①②	N2SC145231 ①②		N2S145234 ①②	N2SC145234 ①②	
						Specify	120	3/4"	N2S245231 ①②	N2SC245231 ①②	480	N2S245234 ①②	N2SC245234 ①②
								1"	N2S345231 ①②	N2SC345231 ①②	N2S345234 ①②	N2SC345234 ①②	
								1/2"	N2S145232 ①②	N2SC145232 ①②	N2S145235 ①②	N2SC145235 ①②	
							240	3/4"	N2S245232 ①②	N2SC245232 ①②	600	N2S245235 ①②	N2SC245235 ①②
								1"	N2S345232 ①②	N2SC345232 ①②	N2S345235 ①②	N2SC345235 ①②	

① Specify lens color for each pilot light

Color	Symbol
Red	J1
Green	J3
Amber	J6
Clear	J10
Blue	J11

② Specify indicating plate markings, if desired. Standard indicating plate markings are listed below:

Pushbuttons

START	TEST	CLOSE
STOP	LIGHT ON	UP
ON	HAND	DOWN
OFF	AUTOMATIC	IN
RUN	EMERGENCY	OUT
JOG	FORWARD	RAISE
TRIP	REVERSE	LOWER
RESET	OPEN	

Two-position

RUN, JOG	FAST, SLOW	IN, OUT
HAND, AUTOMATIC	OPEN, CLOSE	RAISE, LOWER
FORWARD, REVERSE	UP, DOWN	START, STOP
	ON, OFF	

Three-position

RUN, OFF, JOG	1, OFF, 2	
HAND, OFF, AUTOMATIC	OPEN, OFF, CLOSE	
FORWARD, OFF, REVERSE	UP, OFF, DOWN	
FAST, OFF, SLOW		

① Pilot lights are transformer type except those rated 120 volts. Lamp type is 120MB, 120 volts, 3 watts.

② LED pilot lights are available. Add suffix 'LED' after last color symbol.

Ⓚ Suffixes 'S634' or 'S635' may be used on these catalog numbers.

N2S and N2SC control stations

Factory sealed, corrosion-resistant
600 VAC, heavy duty

Cl. I, Div. 2, Groups B, C, D
NEMA 3, 4X, 7BCD (Div. 2), 12
Watertight
Weatherproof
Dusttight

4C

Ordering information:

Custom-built, factory assembled control stations

To order your custom-built factory assembled control station, select the enclosure required and add the desired devices from listings below.

Custom-built factory assembled control stations may thus be ordered as follows:

Example requirements:

3-device control station on Krydon enclosure with 3/4" through feed hubs, with 1 pilot light with green jewel, rated at 120V; 1 three-position, two circuit selector switch marked HAND-OFF-AUTO; and 1 green single circuit pushbutton marked START.

ORDER:

NCDC23FA

N2P310-J3

N2SW11311-HAND-OFF-AUTO

N2PS1111G-START

Pilot light jewel symbol, pushbutton and selector switch plate markings are selected from footnote tables. 'FA' suffix indicates factory assembled.

Note that order of assembly of control stations should be listed in desired mounting order, reading from top to bottom of enclosure.

Enclosures (NCD or NCDC enclosures must be used with MSR1 or MSR2)

No. of devices	Cat. # Without hubs	Cat. # With one 1/2" hub	Cat. # With two 1/2" hubs	Cat. # With one 3/4" hub	Cat. # With two 3/4" hubs	Cat. # With one 1" hub	Cat. # With two 1" hubs
1	NCD01	NCD11	NCDC11	NCD21	NCDC21	NCD31	NCDC31
2	NCD02	NCD12	NCDC12	NCD22	NCDC22	NCD32	NCDC32
3	NCD03	NCD13	NCDC13	NCD23	NCDC23	NCD33	NCDC33
4	NCD04	NCD14	NCDC14	NCD24	NCDC24	NCD34	NCDC34

No. of devices	Cat. # Without hubs	Cat. # With one 1/2" hub	Cat. # With two 1/2" hubs	Cat. # With one 3/4" hub	Cat. # With two 3/4" hubs
1	NCS01	NCS11	NCSC11	NCS21	NCSC21
2	NCS02	NCS12	NCSC12	NCS22	NCSC22
3	NCS03	NCS13	NCSC13	NCS23	NCSC23
4	NCS04	NCS14	NCSC14	NCS24	NCSC24



NCD34

Pilot light



N2PL10 J1

Volts	Cat. #
120	N2PL10 ①
240	N2PL20 ①
480	N2PL40 ①
600	N2PL50 ①

①Specify lens color for each pilot light

Color	Symbol
Red	J1
Green	J3
Amber	J6
Clear	J10
Blue	J11

Pilot lights to be used in N2SU series

Color	Cat. #
Red	N2PLU10 J1 LED
Green	N2PLU10 J3 LED
Amber	N2PLU10 J6 LED
Clear	N2PLU10 J10 LED
Blue	N2PLU10 J11 LED

① Pilot lights are transformer type except those rated 120 volts. Lamp type is 120MB, 120 volts, 3 watts.

② LED pilot lights are available. Add suffix 'LED' after last color symbol.

N2S and N2SC control stations

Factory sealed, corrosion-resistant
600 VAC, heavy duty

Cl. I, Div. 2, Groups B, C, D
NEMA 3, 4X, 7BCD (Div. 2), 12
Watertight
Weatherproof
Dusttight

4C

Ordering information (continued):


Pushbutton stations – momentary contact



N2PS1111G

Color of operator	1 circuit		2 circuits	
	Contact symbol	Cat. # Universal	Contact symbol	Cat. # Universal
Natural		N2PS1111 ②		N2PS1211 ②
Red		N2PS1111R ②		N2PS1211R ②
Green		N2PS1111G ②		N2PS1211G ②

Selector switches

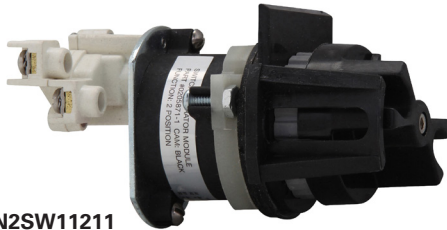

N2SW11211

Style	Switch position			Cat. #
	Position 1	Position 2	Position 3	
Two-position, two circuit	A1			N2SW11211 ②
	A2			
Two-position, four circuit	A1			N2SW12221 ②
	A2			
	B1			
	B2			
Three-position, two circuit ^N	A1			N2SW11311 ②
	A2			
Three-position, four circuit ^N	A1			N2SW12321 ②
	A2			
	B1			
	B2			
Three-position, four circuit ^N	A1			N2SW12322 ②
	A2			
	B1			
	B2			

Pushbutton stations – maintained contact

Color of operator	1 circuit	
	Contact symbol	Cat. # Universal
Red mushroom head		N2PM1111 S111 ②

Closure plug



Description	Cat. #
Closure plug	NP2

②Specify indicating plate markings, if desired. Standard indicating plate markings are listed below:

Pushbuttons		
START	TEST	CLOSE
STOP	LIGHT ON	UP
ON	HAND	DOWN
OFF	AUTOMATIC	IN
RUN	EMERGENCY	OUT
JOG	FORWARD	RAISE
TRIP	REVERSE	LOWER
RESET	OPEN	
Two-position		
RUN, JOG	FAST, SLOW	IN, OUT
HAND, AUTOMATIC	OPEN, CLOSE	RAISE, LOWER
FORWARD, REVERSE	UP, DOWN	START, STOP
	ON, OFF	
Three-position		
RUN, OFF, JOG	1, OFF, 2	
HAND, OFF, AUTOMATIC	OPEN, OFF, CLOSE	
FORWARD, OFF, REVERSE	UP, OFF, DOWN	
FAST, OFF, SLOW		

^NSuffixes 'S634' or 'S635' may be used on these catalog numbers.


N2S and N2SC control stations

Factory sealed, corrosion-resistant
600 VAC, heavy duty

Cl. I, Div. 2, Groups B, C, D
NEMA 3, 4X, 7BCD (Div. 2), 12
Watertight
Weatherproof
Dusttight

4C

Dimensions (in inches):

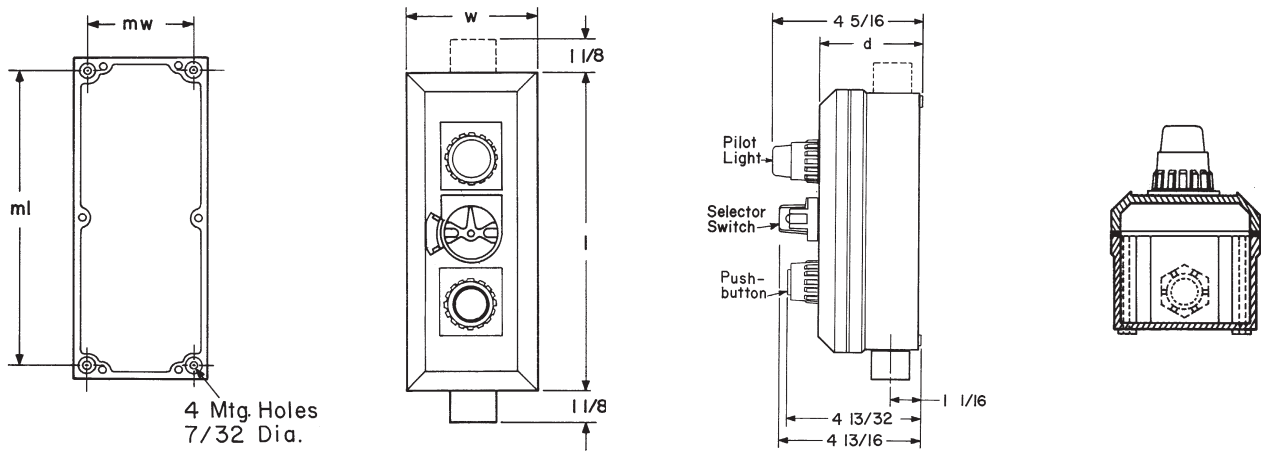

N2S

For $1/2$ " and $3/4$ " hub sizes

N2S(C) body style	Outside dims.			Mounting dims.	
	l	w	d	ml	mw
1 device	$7 \ 1/4$	$3 \ 13/16$	$4 \ 3/8$	$6 \ 3/8$	$2 \ 15/16$
2 devices	$7 \ 1/4$	$3 \ 13/16$	$4 \ 3/8$	$6 \ 3/8$	$2 \ 15/16$
3 devices	$9 \ 1/2$	$3 \ 13/16$	$4 \ 3/8$	$8 \ 5/8$	$2 \ 15/16$
4 devices	$11 \ 3/4$	$3 \ 13/16$	$4 \ 3/8$	$10 \ 7/8$	$2 \ 15/16$